

Frontlit Banner - JF23315



Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Smooth surface makes it perfect for high resolution printing
- No curling edges

Physical properties

Properties	Unit	JF23315
Basic fabric	Denier	200×300
	Threads/Inch ²	12×18
Weight	g/m ²	340
	oz/yd ²	10
Width	M	1.02~3.20
	Inch	39~126
Tensile strength	L	550
	W	400
Tear strength	L	120
	W	100
Peeling strength	N/5cm	30
Standard roll length	M/roll	50

Applications

- Billboard
- Display (indoor and outdoor)
- Banners
- Building murals and instore displays
- Exhibition booth decoration

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



Frontlit Banner - JF530



Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Good properties in tensile strength
- Perfect printability with stable ink absorption and fast drying ability

Physical properties

Properties	Unit	JF530
Basic fabric	Denier	500×300
	Threads/Inch ²	12×18
Weight	g/m ²	440
	oz/yd ²	13
Width	M	1.02~3.50
	Inch	39~137
Tensile strength	L	650
	W	450
Tear strength	L	130
	W	100
Peeling strength	N/5cm	30
Standard roll length	M/roll	50



Applications


- Billboard
- Display (indoor and outdoor)
- Banners
- Building murals and instore displays
- Exhibition booth decoration

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



Frontlit Banner - JF5315

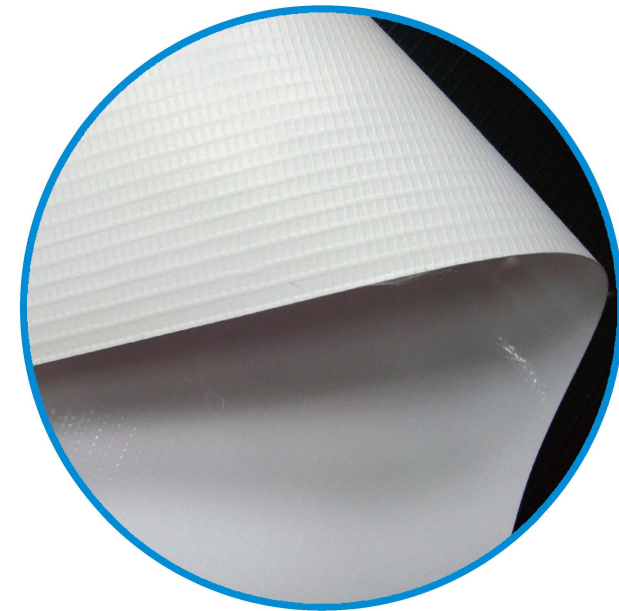

Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Smooth surface makes it perfect for high resolution printing
- Maximum width up to 5M
- No curling edges

Physical properties

Properties	Unit	JF5315
Basic fabric	Denier	500×300
	Threads/Inch ²	12×18
Weight	g/m ²	440
	oz/yd ²	13
Width	M	1.02~5.00
	Inch	39~196
Tensile strength	L	650
	W	N/5cm
Tear strength	L	100
	W	N/5cm
Peeling strength	N/5cm	40
Standard roll length	M/roll	50

Applications


- Billboard
- Display (indoor and outdoor)
- Banners
- Building murals and instore displays
- Exhibition booth decoration

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



Frontlit Banner - JF550

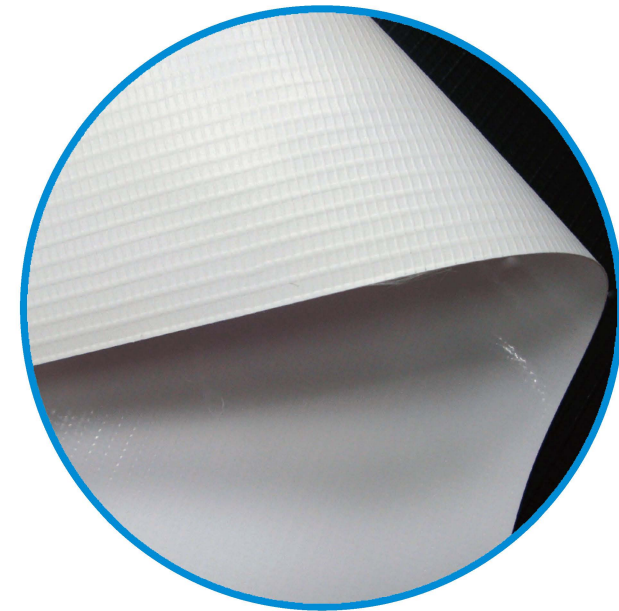

Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Good properties in tensile strength
- Perfect printability with stable ink absorption and fast drying ability

Physical properties

Properties	Unit	JF550
Basic fabric	Denier	500×500
	Threads/Inch ²	9×9
Weight	g/m ²	440
	oz/yd ²	13
Width	M	1.02~3.50
	Inch	39~137
Tensile strength	L	650
	W	500
Tear strength	L	150
	W	100
Peeling strength	N/5cm	30
Standard roll length	M/roll	50

Applications

- Billboard
- Display (indoor and outdoor)
- Banners
- Building murals and instore displays
- Exhibition booth decoration

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



Frontlit Banner - JF5515




Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Smooth surface makes it perfect for high resolution printing
- Maximum width up to 5M
- No curling edges

Physical properties

Properties	Unit	JF5515
Basic fabric	Denier	500×500
	Threads/Inch ²	9×9
Weight	g/m ²	440
	oz/yd ²	13
Width	M	1.02~5.00
	Inch	39~196
Tensile strength	L	850
	W	650
Tear strength	L	150
	W	100
Peeling strength	N/5cm	30
Standard roll length	M/roll	50

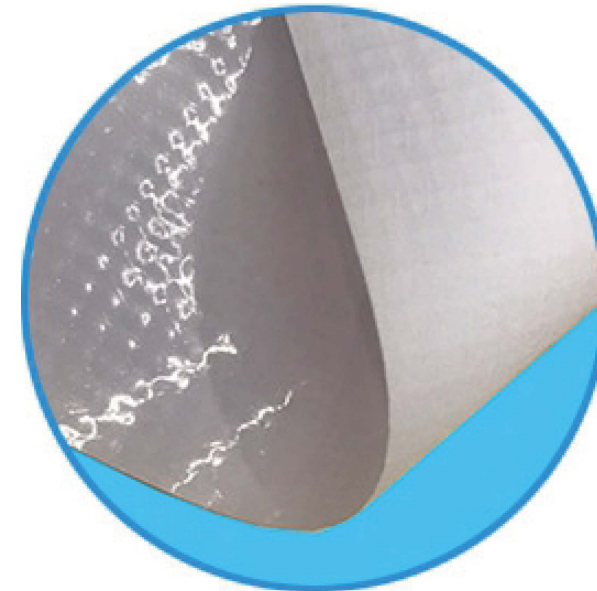

Applications


- Billboard
- Display (indoor and outdoor)
- Banners
- Building murals and instore displays
- Exhibition booth decoration

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



Frontlit Banner - JF1010

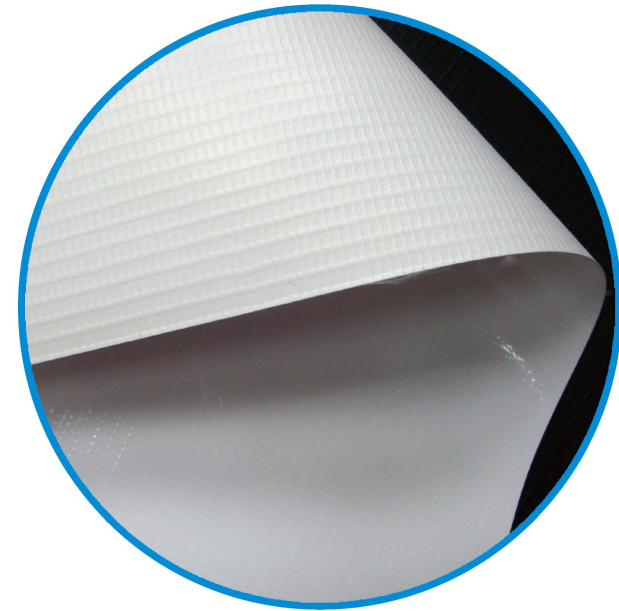

Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Good properties in tensile strength
- Perfect printability with stable ink absorption and fast drying ability

Physical properties

Properties	Unit	JF1010
Basic fabric	Denier	1000×1000
	Threads/Inch ²	9×9
Weight	g/m ²	510
	oz/yd ²	15
Width	M	1.02~3.50
	Inch	39~137
Tensile strength	L	1400
	W	1200
Tear strength	L	350
	W	300
Peeling strength	N/5cm	30
Standard roll length	M/roll	50

Applications

- Billboard
- Display (indoor and outdoor)
- Banners
- Building murals and instore displays
- Exhibition booth decoration

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



Frontlit Banner - JF10115




Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Smooth surface makes it perfect for high resolution printing
- Maximum width up to 5M
- No curling edges

Physical properties

Properties	Unit	JF10115
Basic fabric	Denier	1000×1000
	Threads/Inch ²	9×9
Weight	g/m ²	510
	oz/yd ²	15
Width	M	1.02~5.00
	Inch	39~196
Tensile strength	L	1200
	W	1100
Tear strength	L	280
	W	240
Peeling strength	N/5cm	40
Standard roll length	M/roll	50

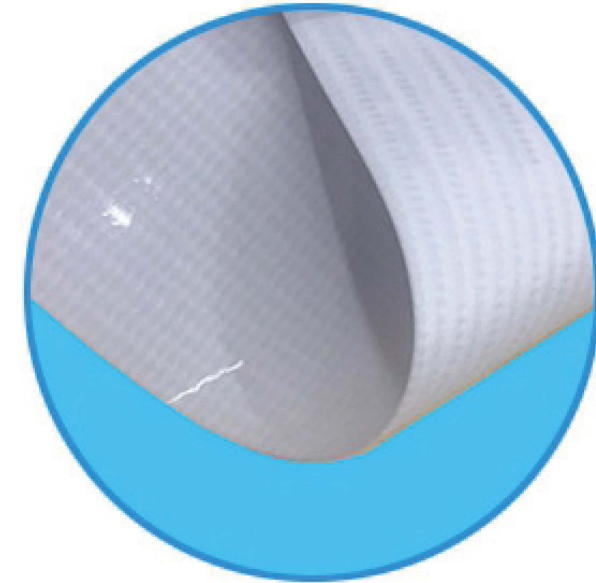

Applications


- Billboard
- Display (indoor and outdoor)
- Banners
- Building murals and instore displays
- Exhibition booth decoration

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



Backlit Banner - JB530

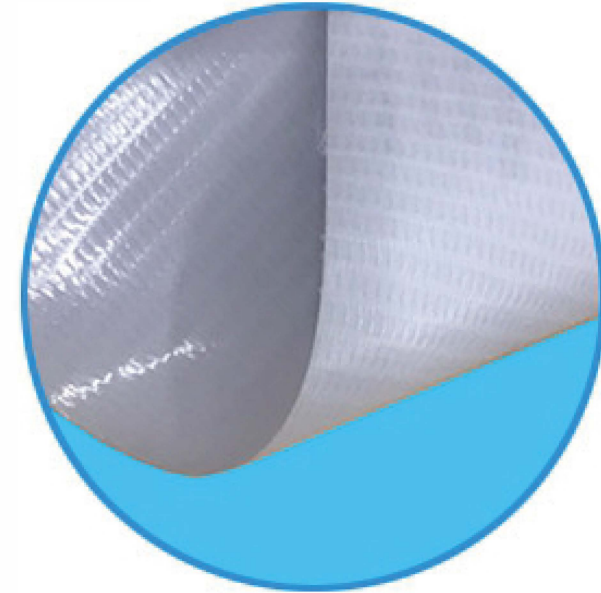

Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Good properties in tensile strength
- Perfect printability with stable ink absorption and fast drying ability

Physical properties

Properties		Unit	JB530
Basic fabric		Denier	500×300
		Threads/Inch ²	12×18
Weight		g/m ²	440
		oz/yd ²	13
Width		M	1.02~3.50
		Inch	39~137
Tensile strength	L	N/5cm	650
	W		450
Tear strength	L	N/5cm	130
	W		100
Peeling strength		N/5cm	30
Standard roll length		M/roll	50

Applications


- Backlit light box
- Bus stop advertising
- Dispalys (indoor and outdoor)

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



Backlit Banner - JB5315

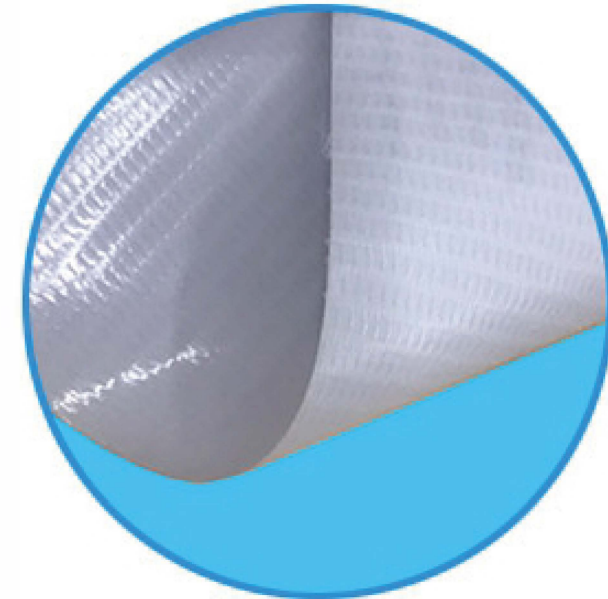

Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Smooth surface makes it perfect for high resolution printing
- Maximum width up to 5M
- No curling edges

Physical properties

Properties		Unit	JB5315
Basic fabric		Denier	500×300
		Threads/Inch ²	12×18
Weight		g/m ²	440
		oz/yd ²	13
Width		M	1.02~5.00
		Inch	39~196
Tensile strength	L	N/5cm	650
	W		450
Tear strength	L	N/5cm	100
	W		60
Peeling strength		N/5cm	40
Standard roll length		M/roll	50

Applications

- Backlit light box
- Bus stop advertising
- Dispalys (indoor and outdoor)

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



Backlit Banner - JB550




Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Good properties in tensile strength
- Perfect printability with stable ink absorption and fast drying ability

Physical properties

Properties		Unit	JB550
Basic fabric		Denier	500×500
		Threads/Inch ²	12×18
Weight		g/m ²	440
		oz/yd ²	13
Width		M	1.02~3.50
		Inch	39~137
Tensile strength	L	N/5cm	820
	W		800
Tear strength	L	N/5cm	150
	W		100
Peeling strength		N/5cm	40
Standard roll length		M/roll	50

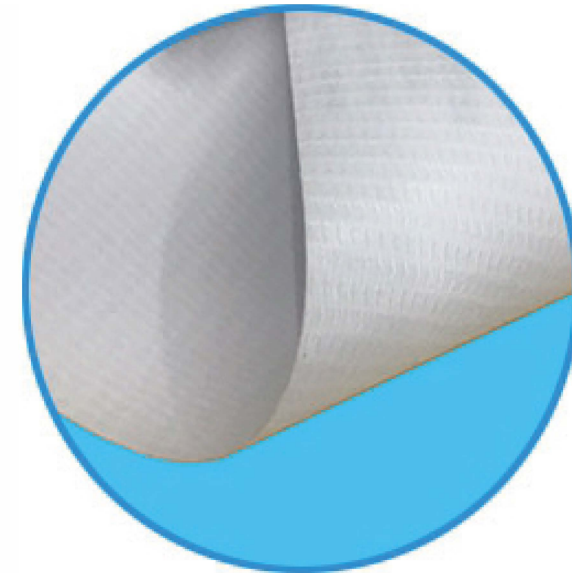

Applications

- Backlit light box
- Bus stop advertising
- Dispalys (indoor and outdoor)

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



Backlit Banner - JB5515




Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Smooth surface makes it perfect for high resolution printing
- Maximum width up to 5M
- No curling edges

Physical properties

Properties		Unit	JB5515
Basic fabric		Denier	500×500
		Threads/Inch ²	12×18
Weight		g/m ²	510
		oz/yd ²	15
Width		M	1.02~5.00
		Inch	39~196
Tensile strength	L	N/5cm	1200
	W		850
Tear strength	L	N/5cm	230
	W		180
Peeling strength		N/5cm	40
Standard roll length		M/roll	50

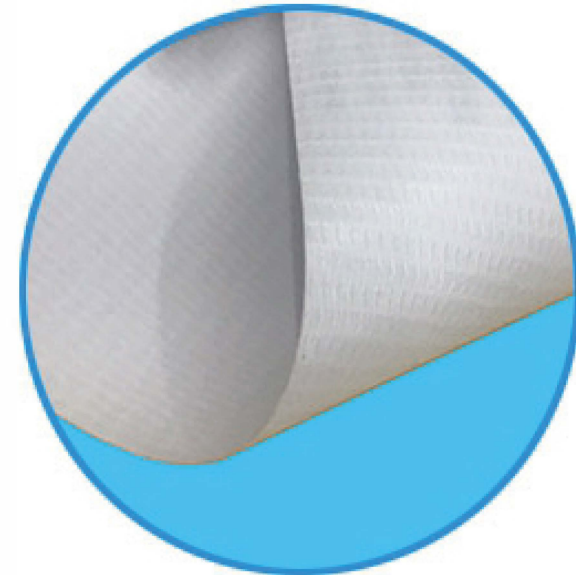

Applications

- Backlit light box
- Bus stop advertising
- Dispalys (indoor and outdoor)

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



Backlit Banner - JB10515




Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Smooth surface makes it perfect for high resolution printing
- Maximum width up to 5M
- No curling edges

Physical properties

Properties		Unit	JB10515
Basic fabric		Denier	500×1000
		Threads/Inch ²	12×18
Weight		g/m ²	610
		oz/yd ²	18
Width		M	1.02~5.00
		Inch	39~196
Tensile strength	L	N/5cm	1400
	W		1100
Tear strength	L	N/5cm	350
	W		300
Peeling strength		N/5cm	40
Standard roll length		M/roll	50

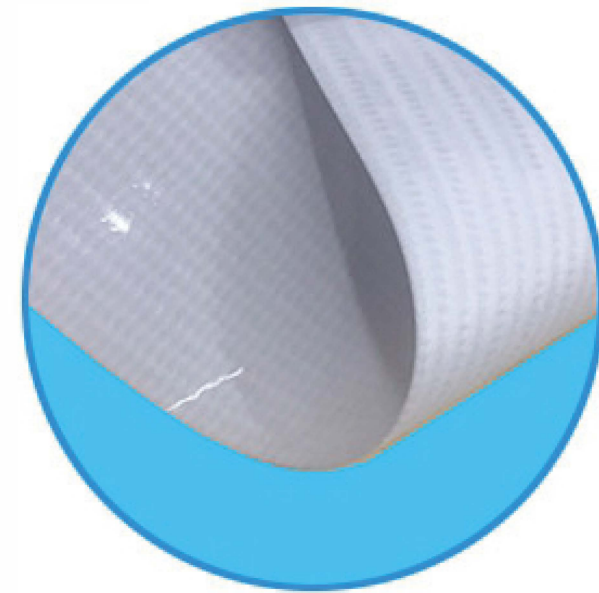

Applications

- Backlit light box
- Bus stop advertising
- Dispalys (indoor and outdoor)

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



White & Black Banner - BW550




Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Good properties in tensile strength
- Black layer laminated provides Blockout purpose at use
- Perfect printing impression with stable ink absorption and fast drying ability

Physical properties

Properties		Unit	BW550
Basic fabric		Denier	500×500
		Threads/Inch ²	9×9
Weight		g/m ²	440
		oz/yd ²	13
Width		M	1.02~3.50
		Inch	39~137
Tensile strength	L	N/5cm	950
	W		750
Tear strength	L	N/5cm	250
	W		200
Peeling strength		N/5cm	30
Standard roll length		M/roll	50

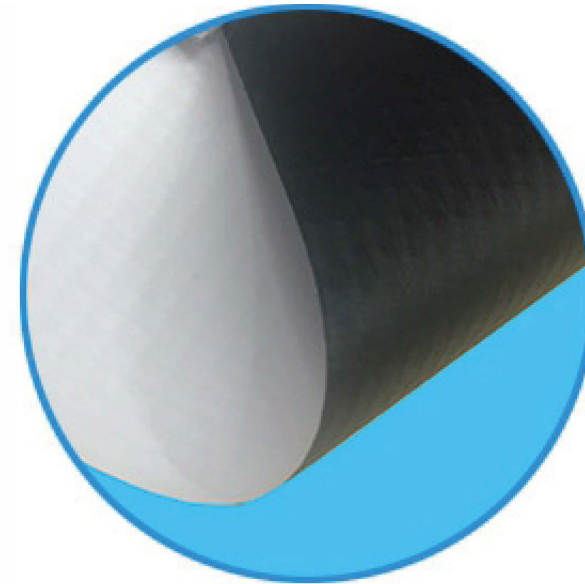

Applications

- Billboard
- Display (indoor and outdoor)
- Banners
- Building murals and instore displays
- Exhibition booth decoration

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



White & Black Banner - BW5515




Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Good properties in tensile strength
- Black layer laminated provides Blockout purpose at use
- Perfect printing impression with stable ink absorption and fast drying ability

Physical properties

Properties	Unit	BW5515
Basic fabric	Denier	500×500
	Threads/Inch ²	9×9
Weight	g/m ²	440
	oz/yd ²	13
Width	M	1.02~5.00
	Inch	39~196
Tensile strength	L	850
	W	650
Tear strength	L	150
	W	100
Peeling strength	N/5cm	40
Standard roll length	M/roll	50

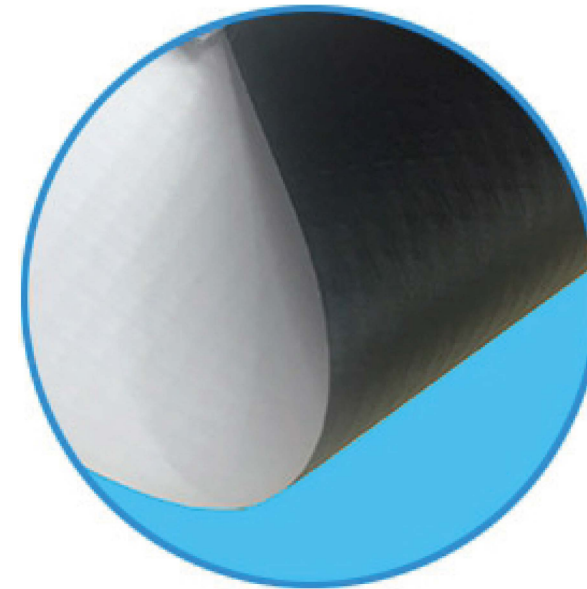

Applications

- Billboard
- Display (indoor and outdoor)
- Banners
- Building murals and instore displays
- Exhibition booth decoration

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



White & Black Banner - BW10115




Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Good properties in tensile strength
- Black layer laminated provides Blockout purpose at use
- Perfect printing impression with stable ink absorption and fast drying ability

Physical properties

Properties	Unit	BW10115
Basic fabric	Denier	1000×1000
	Threads/Inch ²	9×9
Weight	g/m ²	510
	oz/yd ²	15
Width	M	1.02~5.00
	Inch	39~196
Tensile strength	L	1400
	W	1200
Tear strength	L	250
	W	250
Peeling strength	N/5cm	50
Standard roll length	M/roll	50

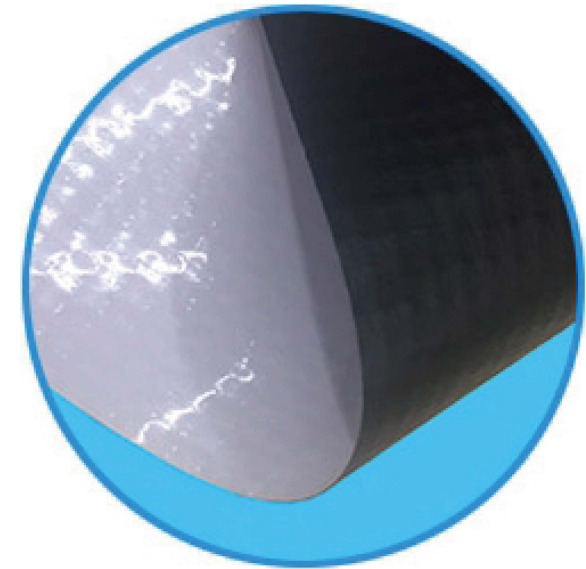

Applications

- Billboard
- Display (indoor and outdoor)
- Banners
- Building murals and instore displays
- Exhibition booth decoration

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



White & Grey Banner - GW530




Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Good properties in tensile strength
- Gray layer laminated provides Blockout purpose at use
- Perfect printing impression with stable ink absorption and fast drying ability

Physical properties

Properties	Unit	GW530
Basic fabric	Denier	500×300
	Threads/Inch ²	12×18
Weight	g/m ²	440
	oz/yd ²	13
Width	M	1.02~3.50
	Inch	39~137
Tensile strength	L	650
	W	450
Tear strength	L	130
	W	100
Peeling strength	N/5cm	30
Standard roll length	M/roll	50

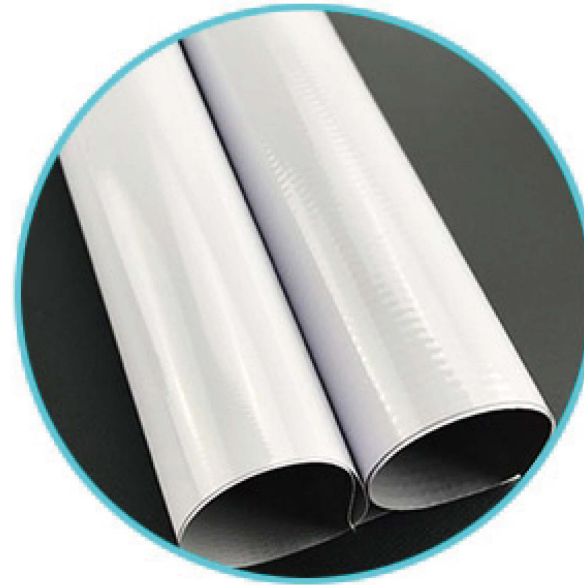

Applications

- Billboard
- Display (indoor and outdoor)
- Banners
- Building murals and instore displays
- Exhibition booth decoration

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



White & Grey Banner - GW5315




Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Good properties in tensile strength
- Gray layer laminated provides Blockout purpose at use
- Perfect printing impression with stable ink absorption and fast drying ability

Physical properties

Properties		Unit	GW5315
Basic fabric		Denier	500×300
		Threads/Inch ²	12×18
Weight		g/m ²	440
		oz/yd ²	13
Width		M	1.02~5.00
		Inch	39~196
Tensile strength	L	N/5cm	650
	W		450
Tear strength	L	N/5cm	100
	W		60
Peeling strength		N/5cm	40
Standard roll length		M/roll	50

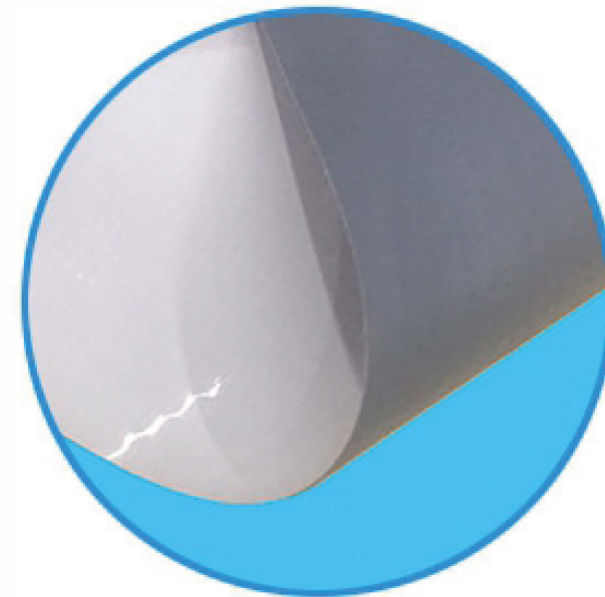

Applications

- Billboard
- Display (indoor and outdoor)
- Banners
- Building murals and instore displays
- Exhibition booth decoration

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct



Blockout - DW1010




Features

- Compatible with various solvent and eco-solvent inks
- Matte & gloss finish surfaces available
- Good properties in tensile strength
- Gray layer laminated provides Blockout purpose at use
- Perfect printing impression with stable ink absorption and fast drying ability

Physical properties

Properties		Unit	DW1010
Basic fabric		Denier	1000×1000
		Threads/Inch ²	9×9
Weight		g/m ²	480
		oz/yd ²	14
Width		M	1.02~3.20
		Inch	39~126
Tensile strength	L	N/5cm	1400
	W		1200
Tear strength	L	N/5cm	250
	W		250
Peeling strength		N/5cm	50
Standard roll length		M/roll	50

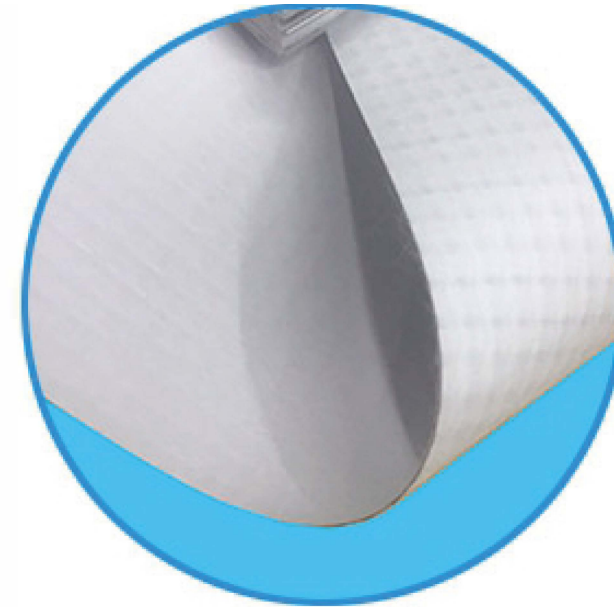

Applications

- Billboard
- Display (indoor and outdoor)
- Banners
- Building murals and instore displays
- Exhibition booth decoration

Ink printability

- Solvent
- Eco-solvent
- Screen printing
- UV
- Dye transfer
- Dye direct

